


PFT COMP P-320


Field-tested and powerful

The COMP P-320 air compressor is a perfect addition for processing a variety of plasters with PFT mixing or conveying pumps. Equipped with a motor protection and safety valve, it guarantees maximum safety.

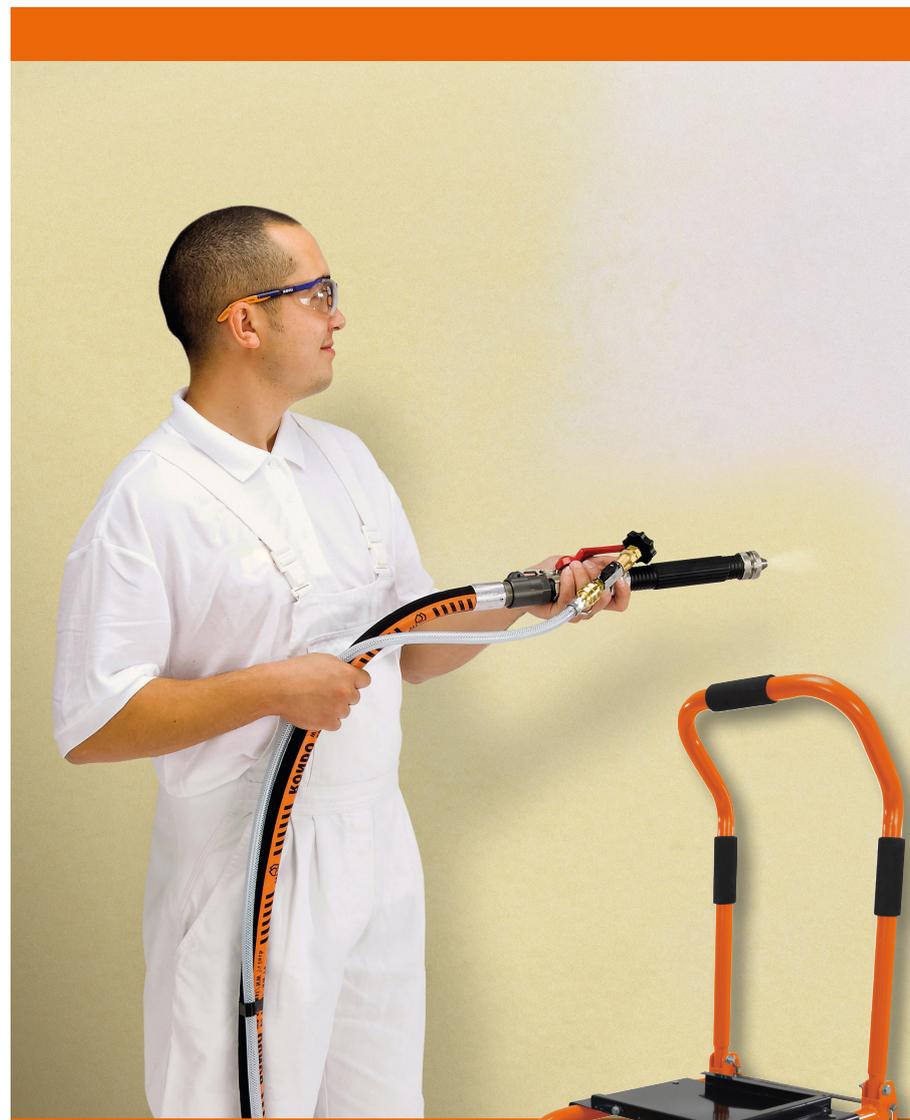

TECHNICAL DATA

Part no.	00746490
Suction capacity	ca. 320 l/min
Filling capacity at 6 bar	ca. 230 l/min
Motor	230 V, 1 Ph, 50 Hz, 2.2 kW, 1,400 rpm
Motor efficiency class	70 %
Working pressure	max. 10 bar
Sound-pressure level	72 dB(A)
Air outflow	1/4"
Power consumption total	10.5 A
Connection value total	11 A
Protection class	IP 23
Connection cable length	2.8 m
Number cylinders / compressor stages	2/1
Hopper content	24 l
Dimensions: L / W / H	800 / 585 / 535 mm
Weight	54 kg



ADVANTAGES AT A GLANCE

 <p>1</p>	 <p>2</p>	<p>1 Simple folding and unfolding of the ergonomic push/carry handle</p> <p>2 Prevention of oil mist in the spray air due to two oil-free compressed air connections</p> <p>3 Quick draining of the condensation water and venting of the pressure vessel through drain tap</p> <p>4 Convenient reading of the extraction and tank pressure on two pressure gauges</p> <p>4 Easily adjustable pressure due to pressure regulator for extraction pressure</p> <p>5 Uncomplicated cable winding due to integrated brackets</p> <p>6 Robust wheels for enormous manoeuvrability</p> <p>Low-noise operation, low wear and tear and longer service life thanks to low-speed technology</p> <p>Reliable motor protection</p> <p>Complete fitting unit with filter pressure reducer</p> <p>Powerful compressor</p>
 <p>3</p>	 <p>4</p>	
 <p>5</p>	 <p>6</p>	

FIELDS OF APPLICATION
<ul style="list-style-type: none"> ■ Spray plaster ■ Levelling plaster ■ Acoustic plaster ■ Texture plaster ■ Reinforcing plaster

ACCESSORIES	PART NO.
<ul style="list-style-type: none"> ■ Extension cable 3 x 2.5 mm², BLA 2-16 A - 25 m ■ Air hose DN9 Ewo male part Ewo female part - 16 m 	<p>20423400</p> <p>00008521</p>



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.

 Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Knauf PFT GmbH & Co. KG	
Einersheimer Str. 53 · D-97346 Iphofen	
Technical Hotline	+49 9323 31-1818
Phone	+49 9323 31-760
Fax	+49 9323 31-770
info@pft.net	www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT COMP P-320 – EN/11.21/PFT