


PFT MINICUT

The practical hot wire cutting tool

The PFT MINICUT proves its worth equally in the building trade, industry and design when processing panel materials. The unit works according to the hot wire method and is available in two versions for panel thicknesses of up to 140 mm or 230 mm.

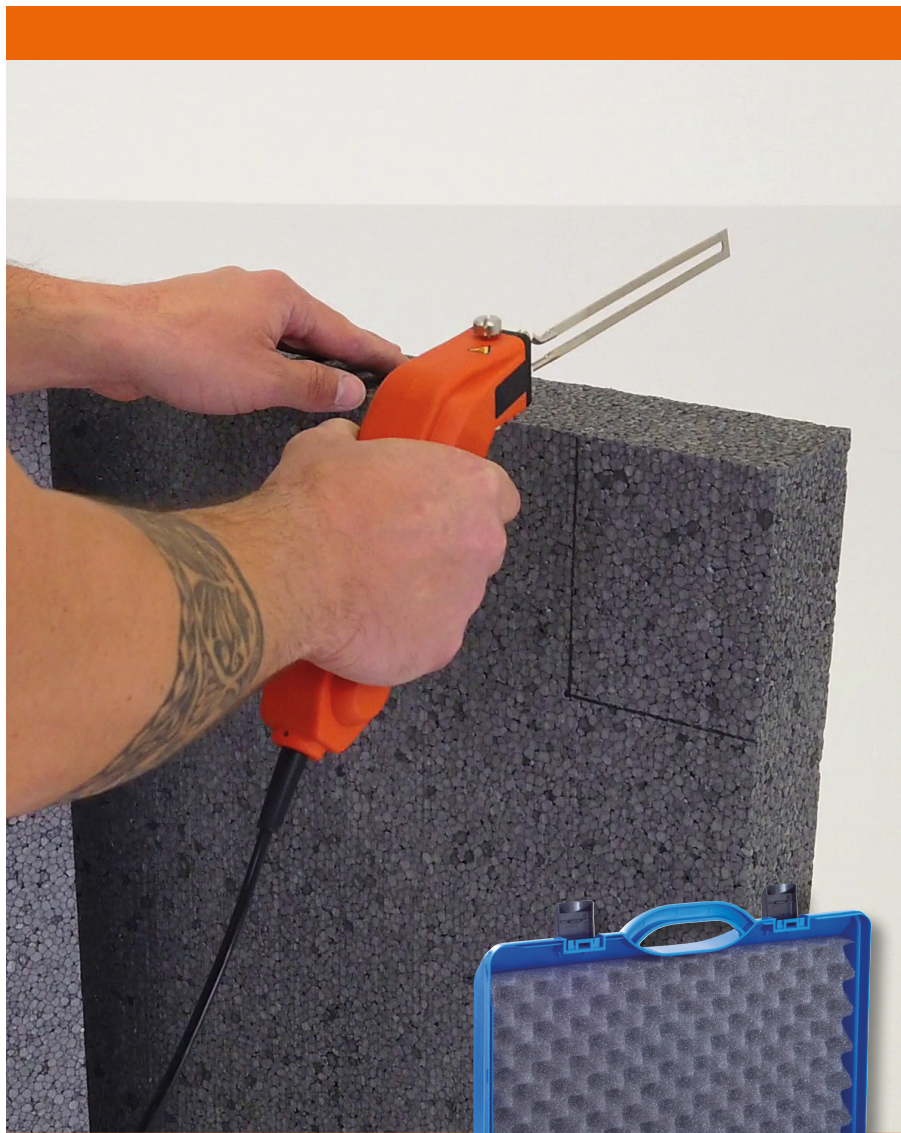

TECHNICAL DATA

MINICUT 140 with transport case

Part no.	00020657
Power connection	230 V, 50 Hz
Power supply	110 W
While cutting	12 s on/48 s off
Cutting temperature	max. 500° C
Power cable	inclusive
Cutting depth	140 mm
Weight with cutting edge:	~ 1 kg

MINICUT 230 with transport case

Part no.	00231284
Power connection	230 V, 50 Hz
Power supply	230 W
While cutting	12 s on/48 s off
Cutting temperature	max. 500° C
Temperature regulation	continuously variable
Power cable	inclusive
Cutting depth	230 mm
Weight with cutting edge:	~ 0.6 kg



ADVANTAGES AT A GLANCE



- 1** Protective insulated hand cutter for professional use in construction, industry and for processing panel materials
- 2** Powerful – Cuts insulation panels with a maximum thickness of 140 mm or 230 mm, depending on the version, using a hot blade
- 3** Easy change of the stainless steel blade
- 4** Comfortable scope of delivery – Practical transport case with accessories such as cleaning brush and operating instructions
- 5** Quickly ready for use – The PFT MINICUT is ready to cut in a maximum of 10 seconds and reaches a cutting temperature of max. 500° C
- 6** Pleasant working – Hot cutting process avoids cutting dust pollution or static charge
- 7** **Practical accessories:**
The PFT Profile cut adapter for MINICUT 230 with cutting tape – 0.35 m (Part no. 00285529) brings further advantages with it:
- 5** Implementation of individual cut-outs over complete insulation panel length with profile cut adapter
- 6** Free choice of depth and width of the cut-out due to the flexible cutting strap
- 7** Realisation of special shapes such as round arches, cuttings for rafters etc. possible without any problems

FIELDS OF APPLICATION

Precise cutting of insulation panels, such as

- Facade insulation panels
- Roof and basement insulation panels
- Rigid polystyrene foam

ACCESSORIES

PART NO.

- | | |
|--|----------|
| ■ Cutting edge flat for MINICUT 140 | 00020410 |
| ■ Replacement cutter without connecting rods for MINICUT 230 | 00284520 |
| ■ Replacement cutter with connecting rods for MINICUT 230 | 00238046 |
| ■ Profile cut adapter for MINICUT 230 with cutting tape – 0.35 m | 00285529 |
| ■ Cutting edge tape for profile cut adapter – 1 m | 00285527 |
| ■ MINICUT 140 – without transport case | 00020290 |

The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpften

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · D-97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photo-mechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT MINICUT – EN/08.21/PFT