

PFT SILOMAT trans plus 105


The compact and transport-friendly conveying unit

The SILOMAT trans plus conveys dry mortar in a fully automatic and dust-free procedure. With very little effort the machine can be established and transported. Handling is considerably simplified by the numerous assistants, such as integrated crane transport eyes or fold-out carrying handles.


TECHNICAL DATA

Part no.	00124365
Conveying distance	100 m
Conveying output	20 kg/min
Motor	400 V, 3 Ph, 50 Hz
Compressor	Power: 5.5 kW Max. pressure: 2.5 bar Air volume: 105 Nm ³ /h
Capacity of conveying pot	55 l
Dimensions: L/W/H	1,100/635/720 mm
Weight	~ 275 kg

Kindly note:
Conveying distance depends on the used materials.




ADVANTAGES AT A GLANCE

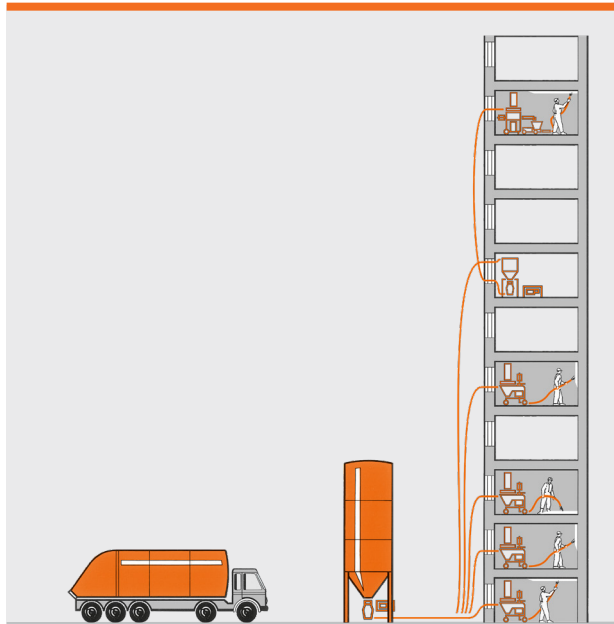


1 Fluidiser: Boosts and ensures the material flow; the vessel is nearly completely emptied

- Maintenance-free
- Resistant to humidity
- Can be retrofitted
- Performance increase by up to 30 %



2 Compressor is a dry running; no oil change needed

3 Rotary compressor: as rollable and portable execution available



4 Crane transport eyes and fold-out carrying handles

Suitable for container/silo discharge flange Ø 250 mm


Shut-off valve with actuator and handwheel


Easily replaceable seals

Bypass: manually controllable for stiff materials and longer delivery reaches

Long machine running times with a high level of operational reliability

Easy replacement of wear parts – also on site





FIELDS OF APPLICATION

- Gypsum-lime plaster
- Cement render
- Lime plaster
- Masonry mortar
- Machine-applied gypsum plaster
- Bulk material
- Aggregate
- Ingredients

ACCESSORIES / VERSIONS

PART NO.

- | | |
|--|----------|
| ■ Conveying hose first equipment DN45 – 73.3 m | 00473424 |
| 1x Rubber conveying hose RONDO air 3-layer DN45 – 13,3 m | |
| 3x Rubber conveying hose RONDO air 3-layer DN45 – 20 m | |
| 1x Hose holder with hook | |
| ■ Injection hood, foldable for G 4 | 00420664 |
| ■ Filling hopper for bagged material | 20716000 |
| ■ Extension cable 5 x 4 mm², RED 5-32 A – 25 m | 20423920 |
| ■ SILOMAT trans plus 105, rollable | 00124366 |

The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpften

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · D-97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT SILOMAT trans plus 105 – EN/06.21/PFT