



PFT G 4 FC-230/400V

The flexible: Elaborate details – unbeatable in the system


The clever solution allows the job site application in 230 voltage and 400 voltage. Use the advantages of both models and increase your machine utilization. Through the easily switch over the pump outlet could adapted without a pump change.

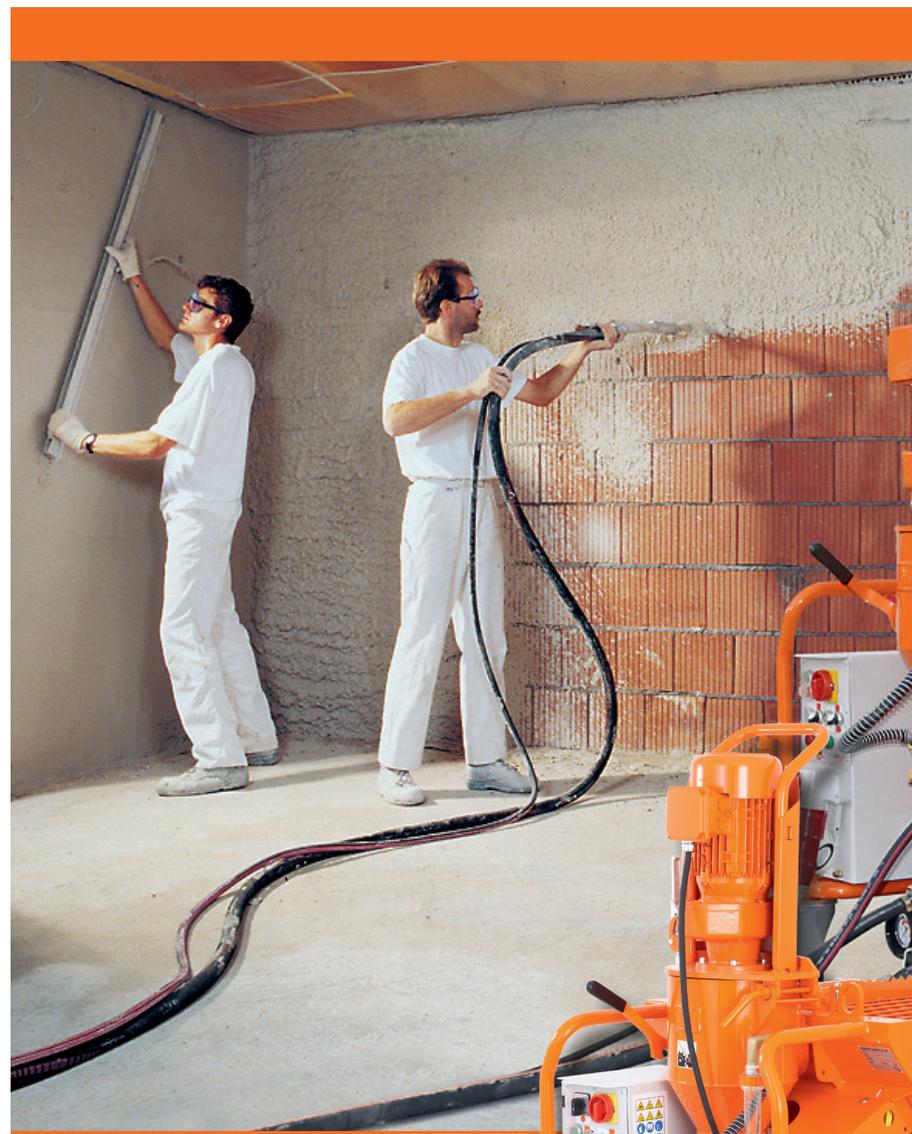

| TECHNICAL DATA | |
|--------------------|---|
| Part no. | 00260621 |
| Conveying capacity | max. 20 l/min |
| Conveying distance | up to 50 m |
| Working pressure | max. 25 bar |
| Rotor / Stator | SD 6-3 slimline |
| Motor | 230 / 400 V, 1/3 Ph, 50 Hz, 6.05 kW, 400 rpm |
| Material outflow | DN35 female part DN25 male part |
| Material hose | RONDO DN25 - 10 m |
| Water pump | AVO 500 230 V, 1 Ph, 50 Hz, 0.37 kW |
| Air compressor | COMP P-200, 230 V, 1 Ph, 50 Hz, 0.5 kW, 200 l/min |
| Spraying gun | DN25-360° S14 200 Geka |
| Connection cable | RED 5-32 A BLU 2-16 A - 1 m |
| Filling height | 910 mm |
| Hopper content | 145 liters |
| Dimensions: L/W/H | 1,200 / 720 / 1,530 mm |
| Total weight | ~310 kg |



ADVANTAGES AT A GLANCE

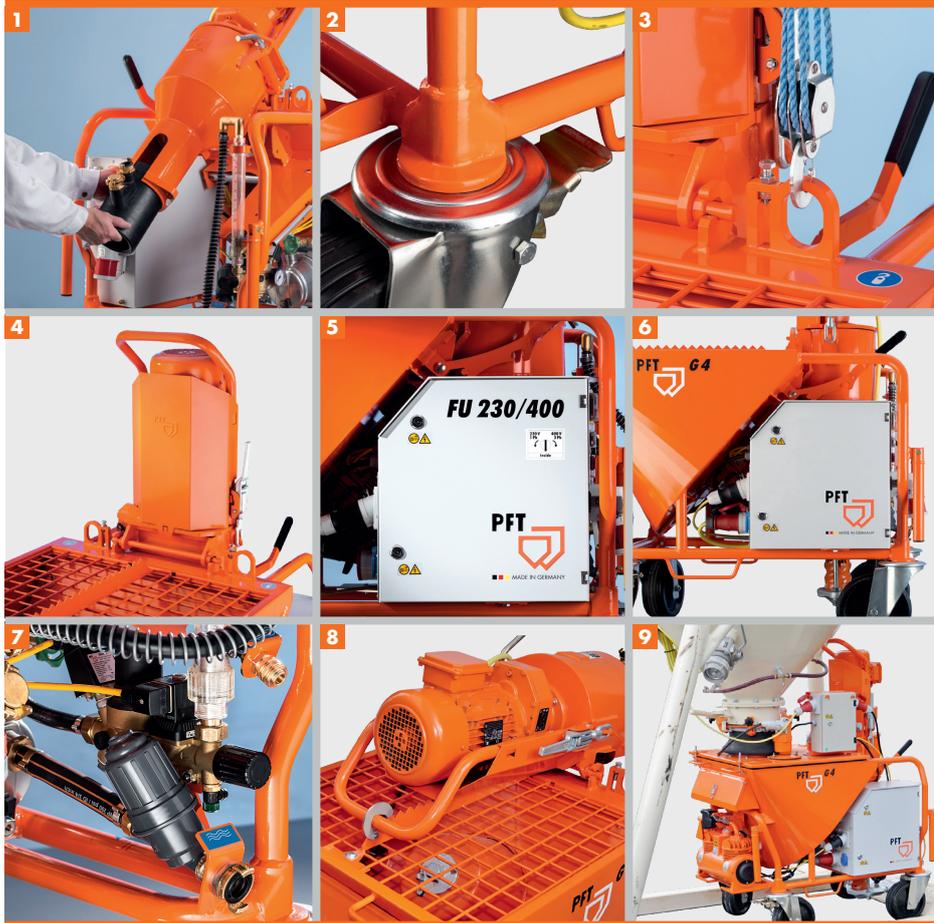

- 1 Easy cleaning – rubber mixing zone with adapter flange for D and R pump
 - 2 Reinforced tubular frame and robust wheel mounts
 - 3 Forklift straps and crane lifting eyes
 - 4 Deflector – reduction of the dust exposure
 - 5 Large control cabinet – maintenance-friendly and protective cover
 - 6 Switches and connectors are in the inner contour of the frame
 - 7 Large water fine filter
 - 8 Practical mixing tube safety hook for easy change of the pump system
 - 9 Easy, fast and efficient – the filling of the machine with material:
 - Direct filling from silo by using the delivery hood
 - Filling with bagged cargo
 - Pneumatic filling from silo by using conveying equipment PFT SILOMAT
- Flexible mixing intensity thanks to two water inlets
 - Frequency converter (FC) for Speed control in 230 V operation
 - Safety transport through four grips with folding-mechanism
 - Maintenance-friendly – water fitting and pressure switch are easily accessible

FIELDS OF APPLICATION

- Gypsum plaster
- Lime-cement plaster
- Light plaster
- Adhesive and reinforcement mortar
- Grouting mortar
- Scratch coat
- Floor screed
- Loam plaster
- Masonry mortar
- Finishing coat
- Insulation material
- Fire protection mortar
- Floor levelling compound

ACCESSORIES

- Extension cable 5 x 4 mm², RED 5-32 A – 50 m
- DUSTCATCHER G 4 complete
- Injection hood including level sensor and extension for remote control cable
- Delivery hood
- ZARGOMAT pro DN25-360°
- JETSET pro DN25 Ewo

PART NO.

- 20423900
- 00539716
- 20600213
- 00471874
- 00420058
- 00418975



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · D-97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights and technical modifications reserved. The respective current version applies. Our warranty refers only to the perfect condition of our machines. Figures given in relation to consumption, quantity and design as well as performance data are based on experience and cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always valid. Illustrations may show customized versions, which are not included in the standard scope of delivery. Change, reprint and photomechanical as well as electronic reproduction, also of excerpts, is only permitted with the explicit approval of Knauf PFT GmbH & Co. KG.

PFT G 4 FC-230/400V – EN/04.23/PFT