

PFT RITMO L FC-230V plus powercoat

Mixing pump for mineral fillers

The proven PFT RITMO L plus with the revolutionary agitator made of stainless steel/rubber which enables the machine to crush lumps and thereby produce a homogenous sprayable thin-wall plaster.




TECHNICAL DATA

Part no.	00 65 96 59
Rotor/Stator	A 2 - 2.5 powercoat
Working pressure	max. 25 bar
Conveying capacity	continuously adjustable up to 3 litres / min
Conveying distance	up to 20 m
Motor	230 V, 1 Ph, 50 Hz, 2.2 kW, 69 - 492 rpm
Connection cable	BLU 3-16 A BLU 2-16 A - 25 m
Spraying gun	powercoat DN13 VA4 1500 Ewo
Material outflow	DN13 female part
Material hose	RONDO DN13 - 15 m
Air hose	DN9 Ewo Ewo - 16 m
Mixing tube	Rubber
Operation	Start/stop infinitely variable speed control
Hopper content	45 litres
Dimensions: L / W / H	750 / 600 / 1,430 mm
Filling height	930 mm
Weight	~ 123 kg

Please note:

Standard values depending on mortar quality, mortar composition, mortar consistency, pump version, pump condition, material hose diameter and delivery height. Ultimately, the respective guidelines of the material manufacturer are decisive.

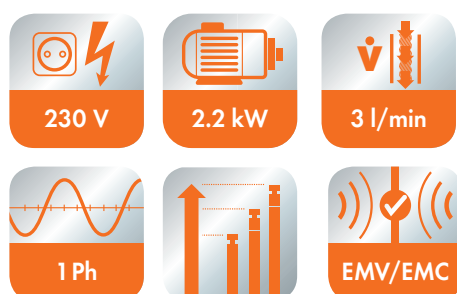

ADVANTAGES AT A GLANCE



- 1** Suitable for bucket and bag material
- 2** Flow-optimized output
- 2** Mortar pressure gauge integrated
- 3** Capacity can be changed by changing the A-, B- and SD-pump unit and adapting the FC parameters
- 4** Easy dismantlable into single modules
 - Motor with tilt flange (a): 30 kg
 - Material hopper with pump unit (b): 26 kg
 - Chassis (c): 64 kg
 - Mixing shaft (d): 3 kg
- 4** In series equipped with external vibrator
- 5** Flexible mixing intensity thanks to two water inlets
- 6** Easy handling on start-up, conversion, maintenance and cleaning
- 6** Foldable motor
- 6** Circumferential sealing edge on the material container for accessories
- 7** Transport is possible in any estate car
- Mounting position for Rotor/Stator mounting
- Conical mixing tube for optimum material flow
- Large insertion area
- Runs powerfully and reliably with luminous flux
- Extension hopper – for double volume

FIELDS OF APPLICATION

- Fine filler (pasty)

ACCESSORIES | SPARE PARTS

PART NO.

- | | |
|---|-------------|
| ■ Extension hopper for RITMO L plus | 00 61 27 29 |
| ■ DUSTCATCHER for material hopper RITMO L plus | 00 61 11 77 |
| ■ DUSTCATCHER for extension hopper RITMO L plus | 00 61 98 34 |
| ■ Mixing shaft BIONIK RITMO L plus powercoat | 00 63 01 60 |
| ■ Stator A 2-2.5 | 00 62 85 87 |
| ■ Rotor A 2-2.5 powercoat | 00 62 85 90 |



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · DE-97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photo-mechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

RITMO L plus powercoat – EN/09.20/PFT